
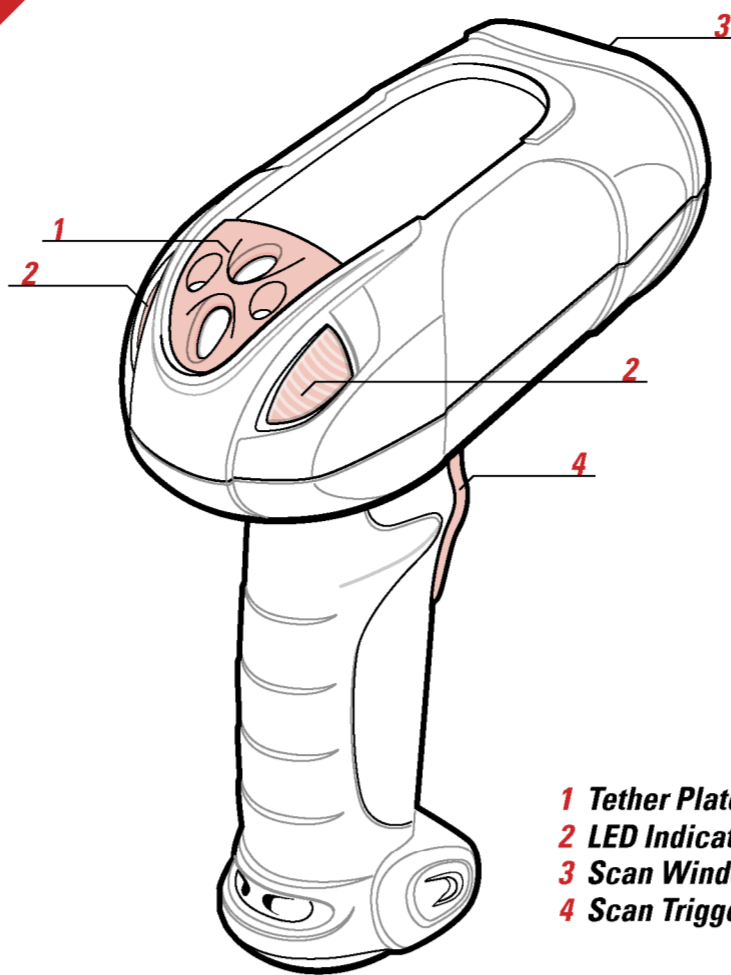


LS 3478 Quick Start Guide


<http://www.symbol.com/barcode>
See Product Reference Guide for more information

POST IN WORK AREA

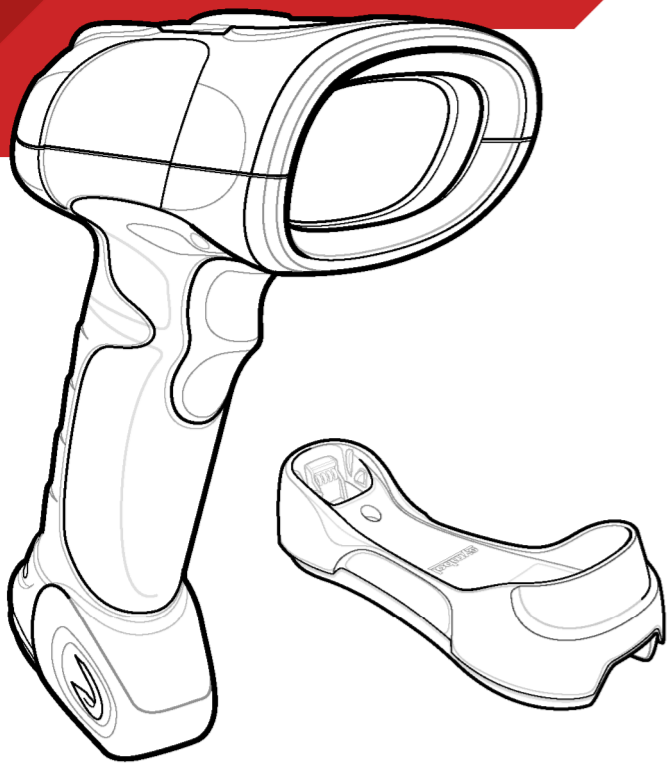


- 1 Tether Plate
- 2 LED Indicators
- 3 Scan Window
- 4 Scan Trigger

Cradle Insertion

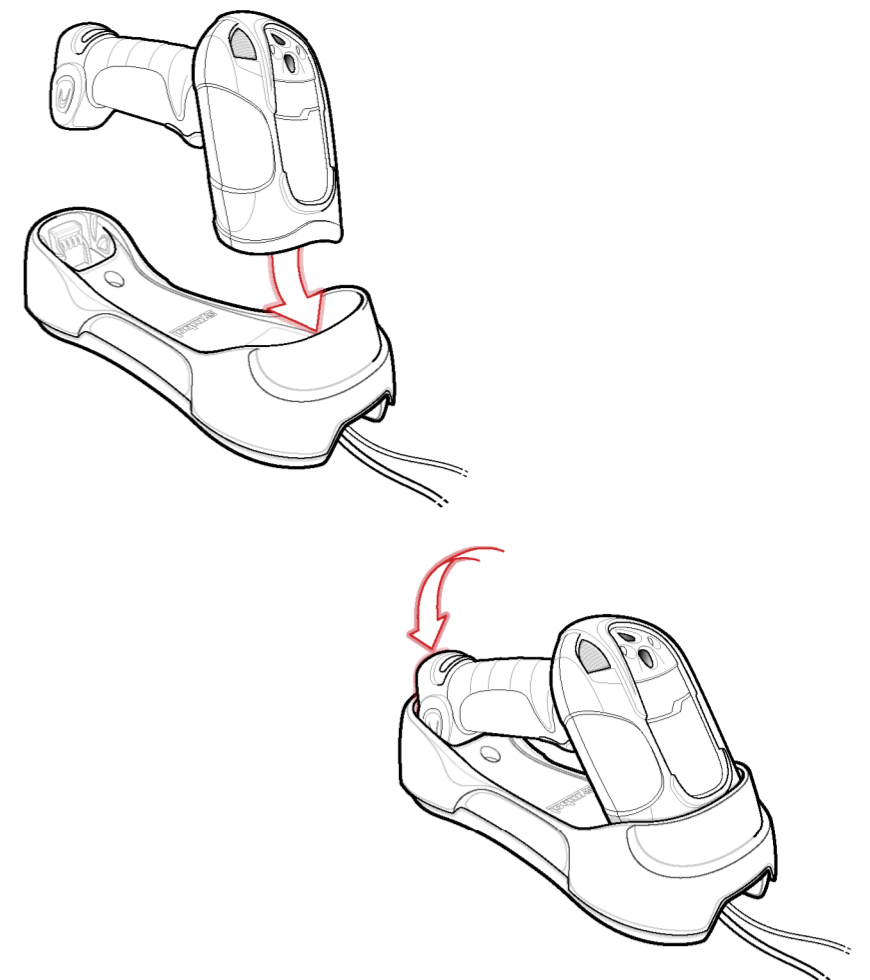



Battery Insertion/Removal

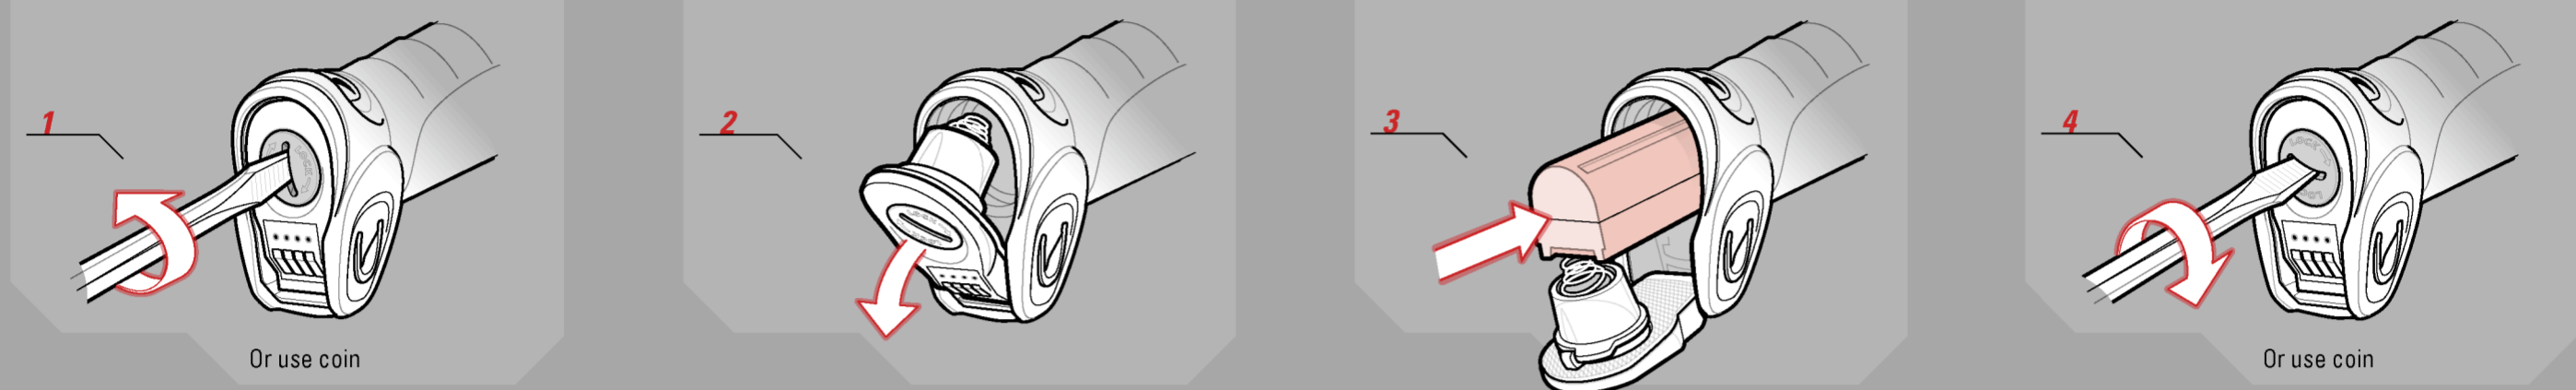


Host Interfaces

NOTE: Cables may vary depending on configuration


Cable Connection at Cradle

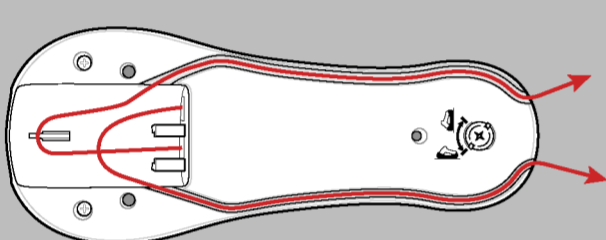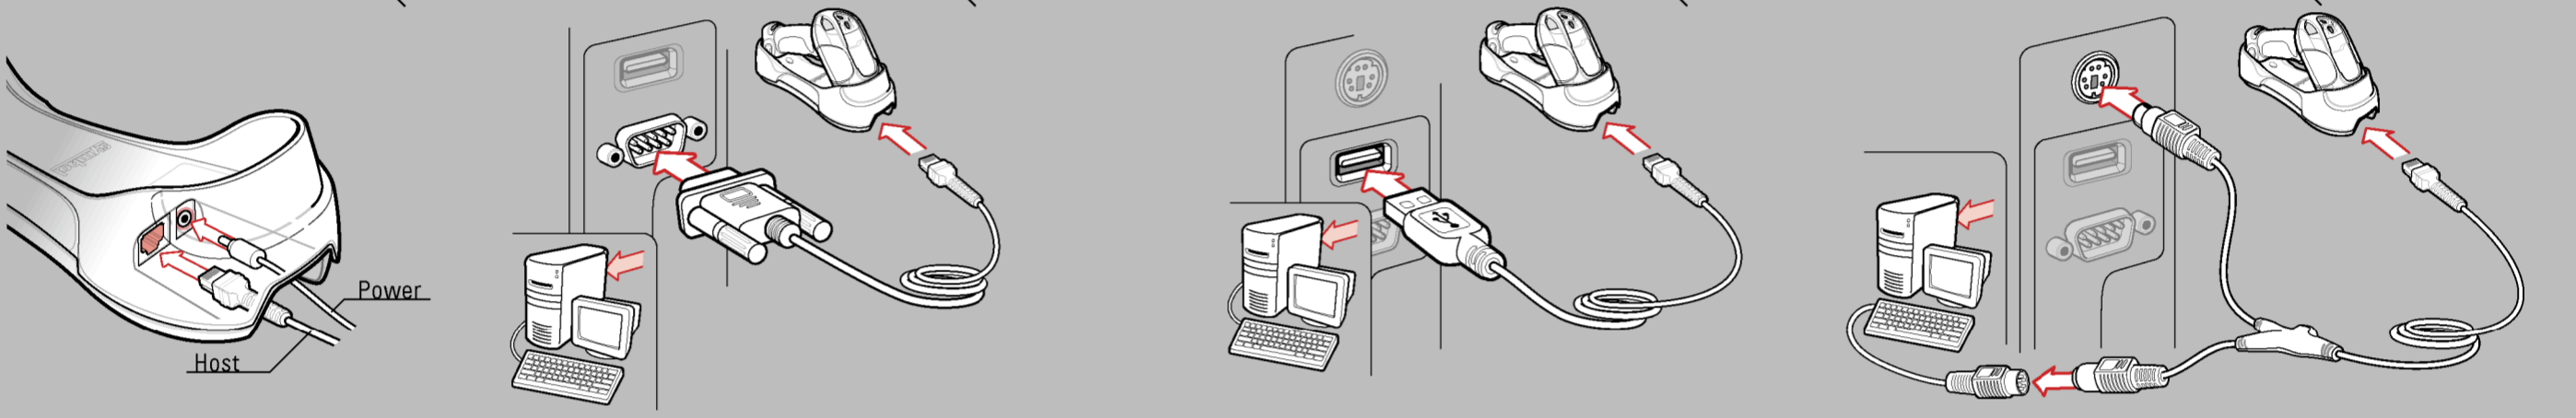


Scanner Emulation

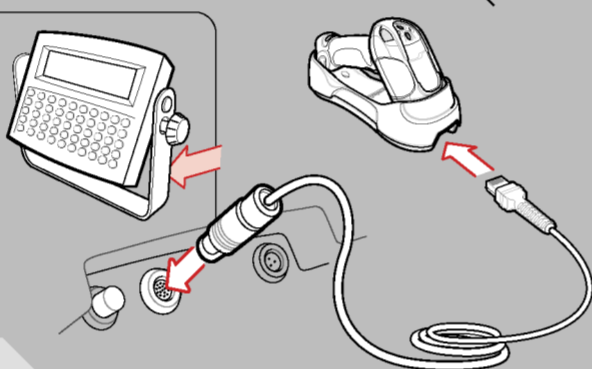

Wand Emulation

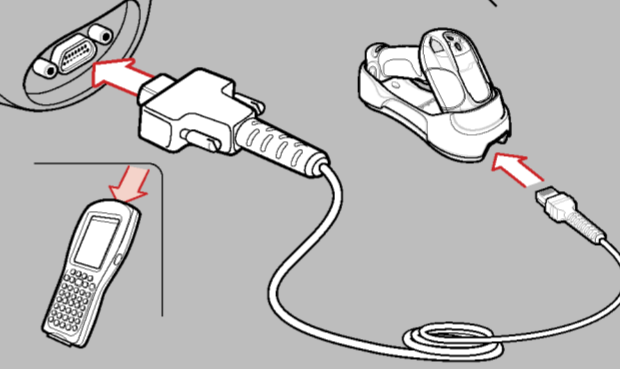

IBM 46XX

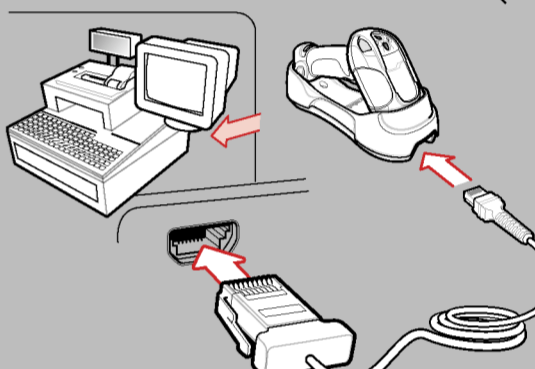

Troubleshooting

Please refer to the LS 3478 Product Reference Guide Troubleshooting section for further information.

Scanner not working

- No power to scanner
Check battery
- End cap not secured correctly
Turn end cap to secure

Scanner not decoding bar code

- Scanner not programmed for bar code type
Ensure scanner is programmed to read type of bar code being scanned
- Bar code unreadable
Ensure bar code is not defaced; try scanning test bar code of same bar code type
- Distance between scanner and bar code incorrect
Move scanner closer to or further from bar code

Scanner decoding bar code, but data not transmitting to host

- Scanner not paired to host-connected cradle
Pair the scanner to the cradle (using the PAIR bar code on the cradle)
- Cradle not programmed for correct host interface
Check scanner host parameters or edit options
- Interface cable is loose
Check for loose cable connections

If data is still not transmitting to host, it may be necessary to recycle power on the cradle

Scanned data incorrectly displayed on host

- Paired cradle host communication parameters do not match the host's parameters
Check cradle host parameters or edit options

LS 3478 Programming Bar Codes

Set Defaults



IBM 46XX Host Types



Scanner Emulation Host Types



Unpairing/Disconnection



Wand Emulation Host Types



USB Host Types




Keyboard Wedge Host Types




IBM HAND-HELD USB




RS-232 Host Types

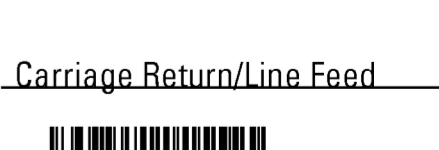

Optimum Scanning Positions

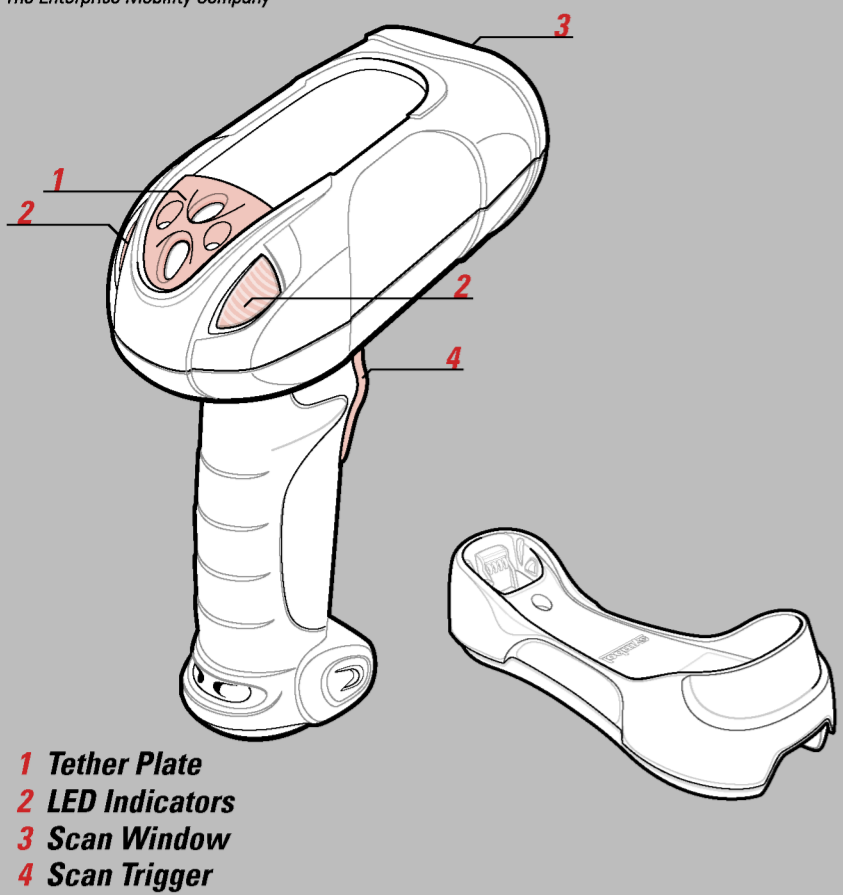

Aiming

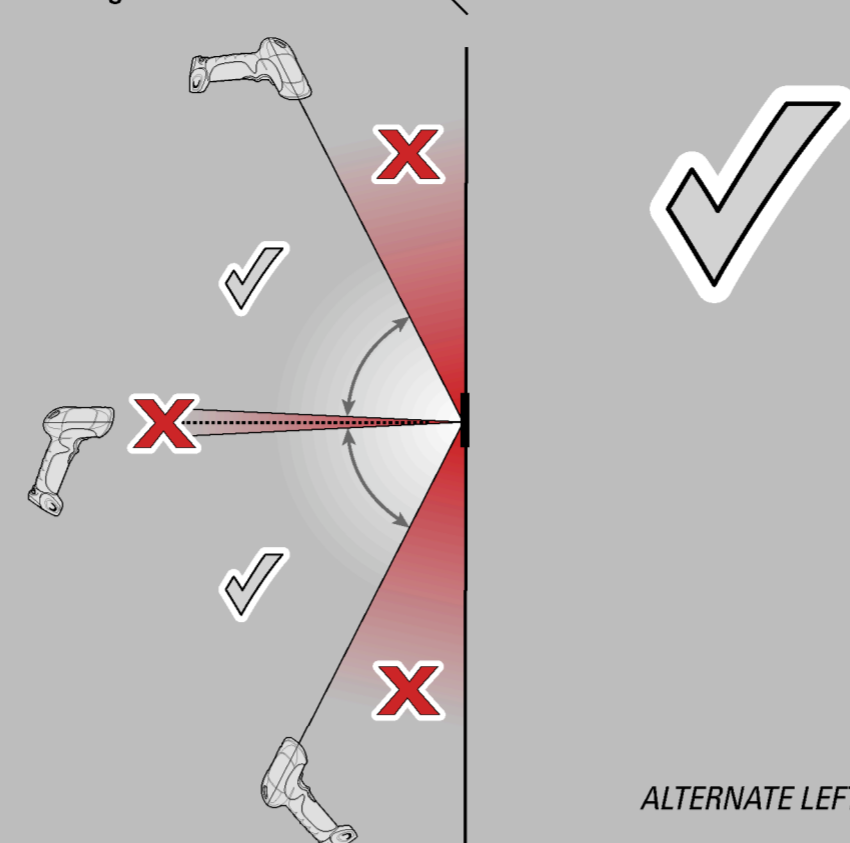


ALTERNATE LEFT AND RIGHT HANDS
TAKING BREAKS AND TASK ROTATION RECOMMENDED

Optimum Upright Body Posture



Avoid Extreme Wrist Angles

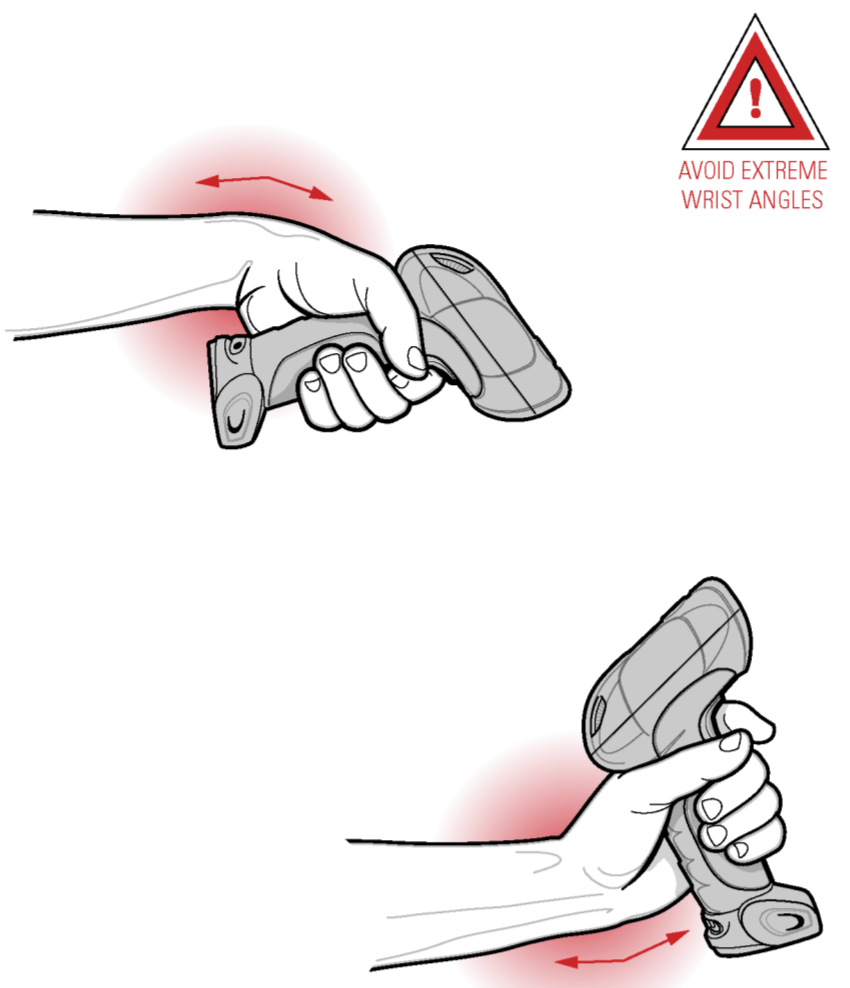

Beeper Indications

| Standard Use | | | |
|------------------------------------|---|---|------------------------|
| Low-medium-high beep | Short high beep | 4 long low beeps | 4 short high beeps |
| Power up | Bar code decoded (if decode beeper enabled) | Transmission error detected; data is ignored | Low battery indication |
| Short low-high beep | High-low beep | Long low-high beep | |
| Scanner has paired with the cradle | Scanner has unpaired from the cradle | Unsuccessful pairing attempt | |
| Parameter Menu Scanning | | | |
| High-low-high-low beep | High-low beep | Long low-high beep | |
| Successful parameter setting | Correct programming sequence performed | Incorrect programming sequence or Cancel bar code scanned | |

LED Indications

| Standard Use | | | |
|---|---|---|---------------------|
| Off | Green | Red | |
| No power applied to scanner, or scanner is on and ready to scan | Bar code successfully decoded | Data transmission error or scanner malfunction | |
| Charging Use | | | |
| Green Slow Flash | Green Fast Flash | Red Flash | Red and Green Flash |
| Scanner charging in slow mode (used when cradle is powered by host cable) | Scanner charging in rapid mode (used when cradle is powered from external power supply) | Charging problem See Product Reference Guide for more information | Temperature fault |

Optimum Body Posture for Low Scanning

ALTERNATE LEFT AND RIGHT KNEES



Optimum Body Posture for Extended Range Scanning



LS 3478 Recommended Usage Guide

72-67137-01 Revision A November 2004

<http://www.symbol.com/barcode>

SYMBOL TECHNOLOGIES, INC. One Symbol Plaza Holtsville, New York 11742-1300

Local Contact:

Regulatory Information

©2004 SYMBOL TECHNOLOGIES, INC. All rights reserved.

Symbol reserves the right to make changes to any product to improve reliability, function, or design. Symbol does not assume any product liability arising out of, or in connection with, the application or use of any product, circuit, or application described herein. No license is granted, either expressly or by implication, estoppel, or otherwise under any patent right or patent, covering or relating to any combination, system, apparatus, machine, material, method, or process in which Symbol products might be used. An implied license exists only for equipment, circuits, and subsystems contained in Symbol products. Symbol and the Symbol logo are registered trademarks of Symbol Technologies, Inc. Other product names mentioned in this manual may be trademarks or registered trademarks of their respective companies and are hereby acknowledged.

Symbol Technologies, Inc., One Symbol Plaza, Holtsville, N.Y. 11742-1300, <http://www.symbol.com>

Patents

This product is covered by one or more of the patents listed on the website: www.symbol.com/patents

Ergonomic Recommendations

Caution: In order to avoid or minimize the potential risk of ergonomic injury follow the recommendations below. Consult with your local Health & Safety Manager to ensure that you are adhering to your company's safety programs to prevent employee injury.

- Reduce or eliminate repetitive motion
- Maintain a natural/neutral position
- Reduce or eliminate excessive force
- Keep objects that are used frequently within easy reach
- Perform tasks at correct heights
- Reduce or eliminate vibration
- Reduce or eliminate direct pressure
- Provide adjustable workstations
- Provide adequate clearance
- Provide a suitable working environment
- Improve work procedures.

Regulatory Information

All Symbol devices are designed to be compliant with rules and regulations in locations they are sold and will be labeled as required. Any changes or modifications to Symbol Technologies equipment, not expressly approved by Symbol Technologies, could void the user's authority to operate the equipment.

Regulatory Information is available in French, Italian, German, Spanish (Spain), Portuguese, Japanese, Korean, and simplified Chinese. Please see Web site: <http://www.symbol.com/manuals> and look for your specific product.

Service Information

Before you use the unit, it must be configured to operate in your facility's network and run your applications.

If you have a problem running your unit or using your equipment, contact your facility's Technical or Systems Support. If there is a problem with the equipment, they will contact the Symbol Support Center:

| | |
|--|---|
| United States | 1-800-653-5350 or 1-631-738-2400 |
| Canada | 905-629-7226 |
| United Kingdom | 0800 328 2424 |
| Asia/Pacific | +65-6796-9000 |
| Australia | 1-800-672-906 |
| Austria/Österreich | 01-5055794-0 |
| Denmark/Danmark | 7020-1718 |
| Finland/Suomi | 9 5407 580 |
| France | 01-40-96-52-21 |
| Germany/Deutschland | 6074-49020 |
| Italy/Italia | 2-484441 |
| Mexico/México | 5-520-1835 |
| Netherlands/Nederland | 315-271700 |
| Norway/Norge | +47 2232 4375 |
| South Africa | 11-8095311 |
| Spain/España | 91 324 40 00 (Inside Spain) +34 91 324 40 00 (Outside Spain) |
| Sweden/Sverige | 08 445 29 00 |
| Latin America Sales Support | 1-800-347-0178 (Inside US) +1-954-255-2610 (Outside US) |
| Europe/Mid-East Distributor Operations | |
| Contact local distributor or call | +44 118 945 7360 |

For the latest version of this guide go to: <http://www.symbol.com/manuals>.



72-67137-01 Revision A November 2004

Country Approval

Regulatory markings are applied to the device signifying the radio (s) are approved for use in the following countries: United States, Canada, Australia, Japan & Europe¹.

Please refer to the Symbol Declaration of Conformity (DoC) for details of other country markings. This is available at <http://www2.symbol.com/doc/>.

Note: For 2.4GHz Products: Europe includes, Austria, Belgium, Czech Republic, Croatia, Cyprus, Denmark, Estonia, Finland, France, Germany, Greece, Hungary, Iceland, Ireland, Italy, Latvia, Liechtenstein, Lithuania, Luxembourg, Malta, Netherlands, Norway, Poland, Portugal, Slovak Republic, Slovenia, Spain, Sweden, Switzerland and the United Kingdom.

Radio Modules

The LS 3478 Scanners contain an approved radio module. This module is the Symbol Bluetooth radio Type: 21-64381

Bluetooth Devices

This product is an approved Bluetooth device. BT ID: BT01784



Operation of the device without regulatory approval is illegal.

Power Supply

Use only a Symbol-approved power supply 50-14000-101 output rated 9 Vdc and minimum 1 A. The power supply is certified to EN60950 with SELV outputs. Use of alternative power supply will invalidate any approval given to this device and may be dangerous.



FCC / EU RF Exposure Guidelines

Safety Information
The device complies with Internationally recognised standards covering Specific Absorption Rate (SAR) related to human exposure to electromagnetic fields from radio devices.

Reducing RF Exposure – Use Properly

It is advisable to use the device only in the normal operating position.

Hand Held Devices:

To comply with FCC RF exposure requirements, this device must be operated in the hand. Other operating configurations should be avoided.

Radio Frequency Interference Requirements

Radio Transmitters (Part 15)
This device complies with Part 15 of the FCC Rules. Operation is subject to the following two conditions: (1) this device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation.

Radio Frequency Interference Requirements – Canada

Radio Transmitters
This device complies with RSS 210 of Industry & Science Canada. Operation is subject to the following two conditions: (1) this device may not cause harmful interference and (2) this device must accept any interference received, including interference that may cause undesired operation.

Label Marking: The Term "IC:" before the radio certification only signifies that Industry Canada technical specifications were met.



Marking and European Economic Area (EEA)

Bluetooth for use through the EEA have the following restrictions:
• Maximum radiated transmit power of 10mW EIRP in the frequency range 2.400 - 2.4835 GHz
• Belgium outside usage, the equipment is restricted to 2.460 - 2.4835 GHz frequency range
• Italy requires a user license for outside usage.

Statement of Compliance

Symbol Technologies, Inc., hereby, declares that this device is in compliance with the essential requirements and other relevant provisions of Directives 1999/5/EC, 89/336/EEC and 73/23/EEC. Declaration of Conformities may be obtained from <http://www2.symbol.com/doc/>

Laser Labels

In accordance with Clause 5, IEC 825 and EN60825, the following information is provided to the user:



| | | |
|---|--|---|
| ENGLISH CLASS 1 CLASS 2 | CLASS 1 LASER PRODUCT LASER LIGHT DO NOT STARE INTO BEAM CLASS 2 LASER PRODUCT | HEBREW רמה 1 מוצר לייזר רמה 1 רמה 2 מוצר לייזר רמה 2 אין לזכוב אל תוך הזרם מוצר לייזר רמה 2 |
| DANISH / DANSK KLASSE 1 KLASSE 2 | KLASSE 1 LASERPRODUKT LASERLYF SE IKKE IND I STRÅLEN KLASSE 2 LASERPRODUKT | ITALIAN / ITALIANO CLASSE 1 CLASSE 2 |
| DUTCH / NEDERLANDS KLASSE 1 KLASSE 2 | KLASSE 1 LASERPRODUKT LASERLICHT NIET IN STRAAL STAREN KLASSE-2 LASERPRODUKT | NORWEGIAN / NORSK KLASSE 1 KLASSE 2 |
| FINNISH / SUOMI LUOKKA 1 LUOKKA 2 | LUOKKA 1 LASERTUOTE LASERVALO ÄLÄ TUJOTA SÄDETTÄ LUOKKA 2 LASERTUOTE | PORTUGUESE / PORTUGUÊS CLASSE 1 CLASSE 2 |
| FRENCH / FRANÇAIS CLASSE 1 CLASSE 2 | PRODUIT LASER DE CLASSE 1 LUMIERE LASER NE PAS REGARDER LE RAYONNEMENT PRODUIT LASER DE CLASSE 2 | SPANISH / ESPAÑOL CLASE 1 CLASE 2 |
| GERMAN / DEUTSCH KLASSE 1 KLASSE 2 | LASERPRODUKT DER KLASSE 1 LASERSTRAHLEN NICHT DIREKT IN DEN LASERSTRAHL SCHAUEN LASERPRODUKT DER KLASSE 2 | SWEDISH / SVENSKA KLASS 1 KLASS 2 |
| JAPANESE / 日本語 第1種 第2種 | 第1種レーザー製品 レーザー光線 光線を見つめないでください 第2種レーザー製品 | CHINESE / 简体中文 1类 2类 |
| | | 1类激光产品 激光切勿直视光束 2类激光产品 |

Laser Devices

Symbol products using lasers comply with US 21CFR1040.10, and IEC825-1:1993, EN60825-1:1994+A11:1996. The laser classification is marked on one of the labels on the device.

Class 1 Laser devices are not considered to be hazardous when used for their intended purpose. The following statement is required to comply with US and international regulations:

Caution: Use of controls, adjustments or performance of procedures other than those specified herein may result in hazardous laser light exposure.

Class 2 laser scanners use a low power, visible light diode. As with any very bright light source, such as the sun, the user should avoid staring directly into the light beam. Momentary exposure to a Class 2 laser is not known to be harmful.

Scanner Labeling

CAUTION: CLASS 2 LASER LIGHT When operating this scanner, the laser beam may be emitted. Avoid direct eye exposure. Do not stare into the beam. Do not use this scanner in areas where children are present. Do not use this scanner in areas where children are present. Do not use this scanner in areas where children are present. Do not use this scanner in areas where children are present.

COMPLIANT WITH EUROPEAN STANDARDS This device is in compliance with the essential requirements and other relevant provisions of Directives 1999/5/EC, 89/336/EEC and 73/23/EEC. Declaration of Conformities may be obtained from <http://www2.symbol.com/doc/>

